



Main Service Entrance AC Surge Protection

SP 165



Citel's SurgePurge 165 model provides high-risk surge suppression capability at your facility's service entrance for both conducted (10/350µs) and induced (8/20µs) transient overvoltages originating from such sources as lightning strikes and utility switching. These protectors incorporate Citel's reliable high intensity modules with individually monitored and fused MOVs. Designed to various national and international standards the SurgeGuard is ideal as a global protection solution.

Applications


- Service entrance panelboards
- Remote entrances located away from utility power grid
- Heavy equipment feeder panels (Elevators, UPS, etc.)

Standards & Guidelines

UL 1449 2nd Edition	USA
IEC 61643-11	International
ANSI/IEEE C62.41	USA
NFC 61740-95	France
VDE0675-6	Germany
CSA C22.2	Canada

Service Entrance Protection

- 165kA transient amps protection (8/20µs)
- 60kA transient amps protection (10/350µs)
- Heavy-duty busbar, modular construction
- Multi-redundant protection circuit per phase
- Full On-Board Diagnostics— Dual stage fault indicators, remote & audible alarms
- 60A, 200kAIC fused disconnect switch
- 10-Year warranty

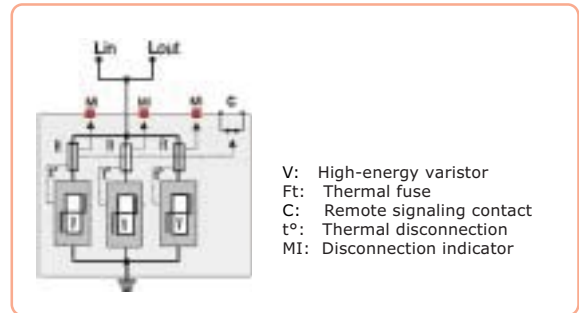

Characteristics

Citel Model SP165	-120Y -120T	-240Y -240D	-277Y -347Y	-480D
System Voltage	120/208V	240/415V	277/480V	480V
	120/240V	240V	347/600V	
MCOV	150V	250V	330V	550V
	150V	250V	440V	
Ipeak 8/20µs	165kA	165kA	165kA	165kA
Ipeak 10/350µs	60kA	60kA	60kA	60kA
ClampV @ 10kA*	585V	840V	955V 1310V	1500V
ClampV @ 500A*	435V	745V	850V 935V	1440V
Diagnostics	Dual stage fault indicators, remote alarm, and audible alarm.			
Housing Materials	NEMA 4/12			
Operating Temperature	-40°C to +85°C			
Operating Altitude	13,000 ft (4,000m)			
Connection Method	Parallel			
Protection Type	MOV-GDT based hybrid			
Connection	screw terminals, up to #2 AWG			
Protection Modes	L-N, L-G, N-G, L-L			
Dimensions	15Hx15Wx7.5D (in inches)			