



MJ8-POE




The MJ8-POE is designed to protect sensitive data-processing equipment connected to a PoE (Power over Ethernet) network from transient overvoltages. The MJ8-POE surge protector is deployed in signal network applications with data transmission speeds of up to 1000 Mbps. The surge protector is housed in a shielded enclosure with high quality shielded RJ45 jacks. The transient protection circuit is based on high energy gas discharge tubes (GDT) and a network of fast response silicon avalanche diodes (SAD) to achieve sharp clamping of very large surge events.

- 10 Base T / 100 Base T / 1000 Base T compatible
- Shielded enclosure and connectors
- 2 kA discharge capability
- IEC 61643-21
- UL479B



Characteristics

CITEL part number	MJ8-POE-A	MJ8-POE-B
Application	PoE and Gigabit Ethernet Networks	PoE and Gigabit Ethernet Networks
Max. data rate	1000 Mbps	1000 Mbps
Standard Compliance	IEEE 802-3af (transmission) IEC 61000-4-5 (surge withstand)	IEEE 802-3af (transmission) IEC 61000-4-5 (surge withstand)
Connections:		
-input	RJ45 shielded	RJ45 shielded
-output	RJ45 shielded	RJ45 shielded
Pinout	8 wires + shielding	8 wires + shielding
Max. DC Power Supply	60 Vdc - 650 mA	7.5 Vdc (1,2,3,6) - 650 mA 60 Vdc (4,5,7,8) - 650 mA
Nominal discharge currents:		
-Line/Line	<500 A @ 8/20 μs	<500 A @ 8/20 μs
-Line/Ground	2000 A @ 8/20 μs	2000 A @ 8/20 μs
Enclosure	Metal	Metal
Connection to bonding network	Screw Terminal	Screw Terminal


Dimensions (in mm)

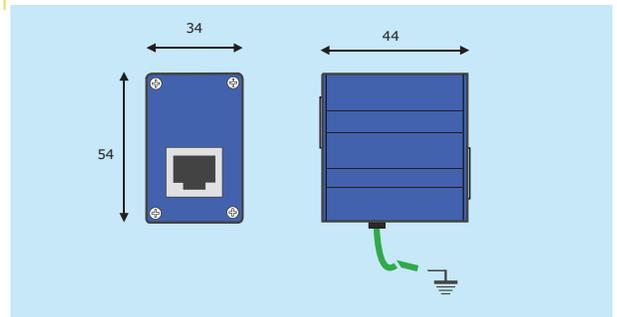


Electrical Diagram (each pair)

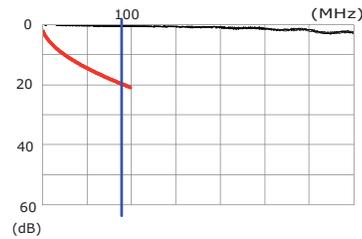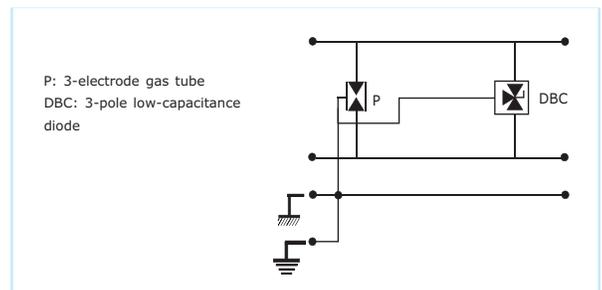

Insertion Loss
1.2 dB @ 100 MHz

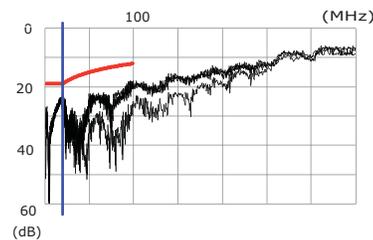

Return Loss
20 dB @ 100 MHz

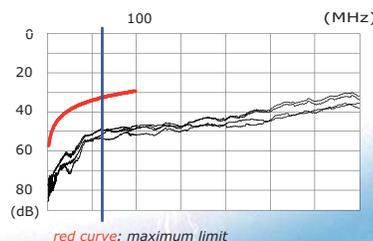

NEXT
45dB @ 100 MHz

red curve: maximum limit