

# PRICE LIST

Effective: May 1, 2023

**800-234-1343**

**2915 Parkway Street - Suite 100**

**Lakeland, FL 33811**

**www.wici.com**

**sales@wici.com**



To Order Call: 800-234-1343 or 863-647-2000

Prices and Specifications subject to change without notice. Prices F.O.B. Lakeland, FL

©2023 by WILKERSON INSTRUMENT CO., INC.

# TERMS AND CONDITIONS OF PURCHASE

2023 marks the 40 th year Wilkerson Instrument Company has produced industrial grade process control instrumentation. It is our mission at our facility to produce the highest quality, most reliable products possible at a reasonable price and follow up that commitment with superior customer service, application support and outstanding warranty coverage. This is all part of the total package Wilkerson Instrument Company provides our customers with each and every purchase.

## **FAST DELIVERY**

Most orders are shipped in three (3) business days WITH NO HANDLING OR EXPEDITING CHARGES EVER. Delivery times will vary depending on the ship method chosen and customer's geographic location. Large quantities and special orders may require more time. Be sure to ask your sales representative if you require expedited service or need to request a specific ship date.

## **SHIPMENTS**

Standard shipments are UPS Ground at our volume discounted rates. All other UPS services are also available, should you need expedited delivery. Fed Ex., DHL, and USPS are available if requested. Any of these services can be C.O.D. at additional cost.

## **TERMS**

Terms of payment include;

- 1%15, Net 30 days from invoice date for open account customers.
- MasterCard, Visa, Discover and American Express are accepted for your convenience.
- All prices are quoted F.O.B. Lakeland, Florida, USA.

PRICES AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## **CANCELLATION OF ORDERS AND RESTOCKING**

In most cases, our "expedited" shipment commitment requires that we start manufacturing your order the day we receive it. Please be sure of your needs and specifications before ordering.

All returned orders are subject to a restocking charge of 20%, plus 10% per month from the Wilkerson Instrument Co., Inc. invoice date.

"Specials" cannot be returned for credit.

Scheduled orders with requested ship dates cancelled 5 business days or less before scheduled shipment are subject to a cancellation charge of 20%.

## **NEW CUSTOMERS**

New customers desiring to open an account should supply:

- Three "trade" credit references.
- Bank reference, account number and contact information.
- Names of Accounts Payable Supervisor and Controller.

Credit checks are usually done by fax and require approximately three (3) business days.

## **DOCUMENTATION**

Each product is shipped with appropriate information for installation, operation, and calibration. Please contact the factory regarding any inquiries or additional questions you may have. All documentation can be downloaded from [www.wici.com](http://www.wici.com).

# TABLE OF CONTENTS

---

	PAGE
Terms and Conditions .....	2
<b>MIGHTY MODULE Series</b>	
Mighty Module Transmitters .....	4
Mighty Module Alarms .....	5
<b>Plug In Modules</b>	
<b>FR Series (Field Rangeable Alarms)</b>	
FR Series .....	5
<b>DIN Rail Mounted</b>	
DIN/MOD Series .....	6
DR Series .....	6
<b>Digital Process Indicators</b>	
DIS Series I .....	6
DIS Series II .....	7
LP400 Loop Powered Series .....	7
<b>Two Wire Transmitters</b>	
SF1000 Series .....	8
SR2000 Series .....	8
TW300 Series .....	8
<b>Level Monitor and Control</b>	
LM1000 Series .....	9
LS1000 Level Sensor .....	9
<b>MOSCAD Interface Products</b>	
SIB-V245/V453 .....	9
SIB-MCE-T1 .....	9
<b>Wireless Signal Conditioners / Alarms</b>	
DR Series .....	9
DR Series Antennas .....	10
DR Series Accessories .....	10
DR Series Enclosures .....	10
Customer Service and Warranty Policy .....	11

# MIGHTY MODULE

## SERIES SIGNAL CONDITIONERS



### PLUG-IN PRODUCTS

		<b>PRICE</b>
MM3200	Valve controller	\$ 365
MM4001	RTD transmitter	360
MM4001ISO	Isolated RTD transmitter	440
MM4003	Potentiometer transmitter	315
MM4003ISO	Isolated Potentiometer transmitter	400
MM4010	DC transmitter	270
MM4010WR	DC transmitter, wide-ranging	315
MM4050	Low input DC transmitter, <50 mV span	335
MM4051	Bridge transmitter	360
MM4100	Thermocouple transmitter	360
MM4100L	Thermocouple transmitter linearized	385
MM4130	Isolated thermocouple transmitter	470
MM4130L	Isolated thermocouple transmitter linearized	485
MM4300A	Limited range DC isolated transmitter	275
MM4300	DC isolated transmitter	410
MM4310	DC isolated transmitter, <50 mV Span	460
MM4380A	Wide ranging DC to DC isolated transmitter	440
MM4400	DC Summing transmitter $Y=(A+B+C+D)/4$	390
MM4401	DC Summing transmitter $Y=(A+B+C)/3$	390
MM4402	DC Summing transmitter $(A + B)/2$	390
MM4403	DC Summing / Difference transmitter $Y=(A+B+C-D)/3$	390
MM4404	DC Summing / Difference transmitter $Y=(A+B-C-D)/2$	390
MM4405	DC Difference transmitter $Y=(A-B-C-D)$	390
MM4406	DC Summing / Difference transmitter $Y=(A+B-C)/2$	390
MM4407	DC Difference transmitter $Y=(A-B-C)$	390
MM4408	DC Difference transmitter $(A - B)$	390
MM4410	DC Multiplier transmitter $(A \times B)$	490
MM4420	DC Divider transmitter $(A/B)$	490
MM4431	DC Power function transmitter $(Y = X^M)$	490
MM6010	Isolated AC voltage and current transmitter	440
MM7010	Frequency transmitter	450
MM7010ISO	Isolated frequency transmitter	535
MM9046	DC power supply	145

### MIGHTY MODULE OPTIONS

		<b>ADD</b>
B	(Thermocouple input only) Downscale output on burnout	\$ 25
DC Power	Inverter isolated 24VDC power (not available on MM9046)	110
	Inverter isolated 24VDC power for MM4300A, MM4380A only	50
OC	Open collector (nnp) output (MM7501 only)	0
P	(Frequency input only) Internal 10K ohms pullup resistor	0
SR100	0.1 ohm, 1%, 7 W shunt resistor	20
RT	Reverse-acting transmitter output	25
U	All circuit boards conformal coated for protection against moisture (per unit)	25
V	Pulse output (16V, 240 ohms source) (MM7501 only)	0
ISO	Isolated output for math function modules	90

# MIGHTY MODULE SERIES LIMIT ALARMS



## FIELD RANGEABLE PLUG-IN LIMIT ALARMS

		<b>PRICE</b>
FR1000 .....	DC Input Single Alarm with Adjustable Deadband and Jumper Selectable Latching .....	\$ 275
FR1020 .....	DC Input Dual Alarm with Adjustable Deadband and Jumper Selectable Latching .....	375

## FIXED RANGE PLUG-IN LIMIT ALARMS

### SINGLE ALARM, ADJUSTABLE DEADBAND (0.5-100%)

		<b>PRICE</b>
MM1000 .....	DC Voltage or Current Input .....	\$ 265
MM1000A .....	DC Voltage or Current Input .....	220
MM1005 .....	4/20 mADC Input with 24 VDC Power Supply .....	345
MM1200 .....	Thermocouple Input .....	365
MM1400 .....	RTD Input .....	365
MM1500 .....	Strain Gauge (Bridge) Input .....	365
MM1600 .....	AC Voltage or Current Input .....	365
MM1700 .....	Frequency Input .....	365
MM1800 .....	Potentiometer Input .....	365

### SINGLE ALARM, LATCHING

		<b>PRICE</b>
MM1010 .....	DC Voltage or Current Input .....	\$ 315
MM1210 .....	Thermocouple Input .....	415
MM1410 .....	RTD Input .....	415
MM1510 .....	Strain Gauge (Bridge) Input .....	415
MM1610 .....	AC Voltage or Current Input .....	415
MM1710 .....	Frequency Input .....	415
MM1810 .....	Potentiometer Input .....	415

### DUAL ALARM, FIXED DEADBAND (0.5%)

		<b>PRICE</b>
MM1020 .....	DC Voltage or Current Input .....	\$ 350
MM1220 .....	Thermocouple Input .....	455
MM1420 .....	RTD Input .....	455
MM1520 .....	Strain Gauge (Bridge) Input .....	455
MM1620 .....	AC Voltage or Current Input .....	455
MM1720 .....	Frequency Input .....	455
MM1820 .....	Potentiometer Input, Dual Alarm .....	455

### MM SERIES ALARM OPTIONS

		<b>ADD</b>
A .....	(Dual Alarms only) Top-accessed screwdriver adjustable deadbands .....	\$ 95
B .....	(Thermocouple input only) Downscale output on burnout .....	25
D .....	(Dual Alarms only) Latching alarms .....	95
DC .....	Inverter isolated 24 VDC power .....	110
	(Not available on MM1005.) .....	
	(FR Series only) .....	90
E .....	(RTD input only) 11-pin configuration (20-pin is standard) .....	0
P .....	(Frequency input only) Internal 10 kilohms pullup resistor. ....	0
R .....	Reverse sense: .....	
	Single alarms .....	25
	Dual alarm .....	40
S .....	(DC input only) Low input voltage (Not available with wide-range input) .....	50
SR100 .....	0.1 ohm, 1%, 7 W shunt resistor .....	20
U .....	All circuit boards conformal coated (per unit) .....	25
V .....	Relay driver output .....	
	Single alarm .....	25
	Dual alarm .....	40

### MOUNTING HARDWARE FOR ALL MIGHTY MODULES

		<b>PRICE</b>
DMP008 .....	Molded plastic socket, DIN-rail mount (8-pin) .....	\$ 20
DMP011 .....	Molded plastic socket, DIN-rail mount (11-pin) .....	25
CLP-1 .....	Hold-down clip for Mighty Modules (for use with MP008 and MP011) .....	20
DR1 .....	35mm Symmetrical DIN Rail, 1 meter length .....	25
TRK48 .....	48" Plastic Snap-Track (Accepts MP008 and MP011) .....	30
HKB-HK2D-8 .....	Explosion-proof housing with 2" dome cover and 8-pin socket (Killark HK Series). For standard-height, 8-pin Mighty Modules .....	325
HKB-HK2D-11 .....	Explosion-proof housing with 2" dome cover and 11-pin socket (Killark HK Series). For standard-height, 11-pin Mighty Modules .....	330



# SERIES SIGNAL CONDITIONERS



		<b>PRICE</b>
DM3801 .....	Valve Controller .....	\$ 485
DM4001 .....	RTD .....	455
DM4003 .....	Potentiometer .....	410
DM4051 .....	Strain Gauge (Bridge) .....	455
DM4130 .....	Thermocouple .....	455
DM4300A .....	DC to DC (Standard) .....	320
	(High speed) .....	350
DM4380A .....	DC to DC .....	425
DM4391 .....	Loop Powered Isolator	
	DM4391-1 (Single channel) .....	260
	DM4391-2 (Dual channel) .....	480
DM6010 .....	AC RMS .....	485
DM7010 .....	Frequency .....	455

## DIN MOD SERIES OPTIONS

24VDC Power .....	<b>PRICE</b>
	\$ 70



# SIGNAL CONDITIONERS



		<b>PRICE</b>
DR4300 .....	DC to DC Fixed Range .....	\$ 280
DR4380A .....	DC to DC Field Rangeable .....	390
DR4302 .....	Single Input, Dual Isolated 4/20 mA Output (Splitter) .....	310
DR1920 .....	Back-Up Pump Controller / Alarm .....	395
DR6305 .....	3-Phase, Phase Monitor Transmitter and Alarm .....	430



## DIN MOD SERIES ACCESSORIES

DR1 .....	35mm Symmetrical DIN Rail, 1 meter length .....	\$ 25
-----------	---	-------

# DIS SERIES™

## PROCESS INDICATORS



### 3.5 DIGIT DISPLAY

		<b>PRICE</b>
DIS471 .....	DC Input Process Indicator with Field Replaceable Range Card .....	\$ 290
DIS471-24 .....	4/20 mADC Input, Provides 24 V for external use .....	320
DIS472 .....	AC Input Process Indicator .....	365
DIS473 .....	RTD Input Process Indicator .....	365
DIS474 .....	Thermocouple Input Process Indicator with Field Replaceable Range Card .....	505
DIS475 .....	Frequency Input Process Indicator .....	365
DIS476 .....	Potentiometer Input Process Indicator .....	365
DIS471B .....	DC Powered, DC Input Process Indicator .....	290
DIS471B-24 .....	DC Powered 4/20 mADC Input, Provides 24 V for external use .....	300
DIS471B-R .....	DC Powered, DC Input Field Rangeable Indicator .....	325
DIS472B .....	DC Powered, AC Input Process Indicator .....	315

### DIS SERIES I RANGE CARDS

DIS471 RANGE CARD .....	Range Card for DIS471 .....	100
DIS474 RANGE CARD .....	Range Card for DIS474 .....	100

# DIS SERIES™

## PROCESS INDICATORS



### 3.5 DIGIT DISPLAY

		<b>PRICE</b>
DIS871 .....	DC Voltage or Current Input .....	\$ 525
DIS871-24 .....	DC Input with 24 V Power Supply for Two-Wire transmitter .....	525
DIS872 .....	AC Voltage or Current Input .....	480
DIS873 .....	RTD Input .....	530
DIS874 .....	Thermocouple Input .....	565
DIS875 .....	Frequency Input .....	540
DIS876 .....	Potentiometer Input .....	540
DIS877-1 .....	DC Multiplier Input (AxB) .....	650
DIS877-2 .....	DC Divider Input (A/B) .....	650
DIS877-3 .....	DC Power Function Input (Y=X <sup>M</sup> ) .....	650
DIS878 .....	Strain Gauge (Bridge) Input .....	560
DIS879-1 .....	DC Summing Input (A+B+C)/3 .....	560
DIS879-2 .....	DC Summing Input (A+B)/2 .....	560
DIS879-6 .....	DC Sum/Difference Input (A+B-C)/2 .....	560
DIS879-7 .....	DC Difference Input (A-B-C) .....	560
DIS879-8 .....	DC Difference Input (A-B) .....	560

### 4.5 DIGIT DISPLAY

DIS971 .....	DC Voltage or Current Input .....	565
DIS971-24 .....	DC Input with 24 V Power Supply for Two-Wire transmitter .....	565
DIS972 .....	AC Voltage or Current Input .....	530
DIS973 .....	RTD Input .....	580
DIS974 .....	Thermocouple Input .....	605
DIS975 .....	Frequency Input .....	585
DIS976 .....	Potentiometer Input .....	585
DIS977-1 .....	DC Multiplier Input (AxB) .....	700
DIS977-2 .....	DC Divider Input (A/B) .....	700
DIS977-3 .....	DC Power Function Input (Y=X <sup>M</sup> ) .....	700
DIS978 .....	Strain Gauge (Bridge) Input .....	600
DIS979-1 .....	DC Summing Input (A+B+C)/3 .....	600
DIS979-2 .....	DC Summing Input (A+B)/2 .....	600
DIS979-6 .....	DC Sum/Difference Input (A+B-C)/2 .....	600
DIS979-7 .....	DC Difference Input (A-B-C) .....	600
DIS979-8 .....	DC Difference Input (A-B) .....	600

### PROCESS INDICATOR OPTIONS

		<b>ADD</b>
SA *H(L) .....	Single Alarm .....	\$ 100
DA *H(L) .....	Dual Alarm .....	200
TX .....	Transmitter Output (isolated only) .....	125
B .....	(Thermocouples only) Downscale output on burnout .....	25
R .....	Reverse sense: Single alarm .....	25
	Dual alarm .....	40
RD .....	Reverse-acting display .....	25
RT .....	Reverse-acting transmitter output .....	25
S .....	(DISX71 only) Low input voltage (not available with wide range input) .....	60
U .....	All circuit boards conformal coated for protection against moisture .....(per unit) .....	25
WR .....	Wide range input (DC input only) .....	60

# LP SERIES™

## LOOP POWERED PROCESS INDICATORS



		<b>PRICE</b>
LP400 .....	Loop Powered Display, field mount .....	\$ 425
LP420 .....	Loop Powered Display, explosion-proof .....	660

### LP400 SERIES OPTIONS

RD .....	Reverse-acting display .....	\$ 25
----------	------------------------------	-------

### LP400 SERIES ACCESSORIES

		<b>PRICE</b>
PMK400 .....	Pipe Mounting Kit (pipe size limited to size of strap) .....	\$ 50

# Silver Series™

## SF1000 SILVER SERIES TWO-WIRE TRANSMITTERS



		<b>PRICE</b>
SF1302 .....	Low profile, Stackable, 2-wire input RTD transmitter .....	\$ 105

## SR2000 SILVER SERIES TWO-WIRE TRANSMITTERS



		<b>PRICE</b>
SR2101 .....	DC transmitter, isolated (includes range card) .....	\$ 290
SR2300 .....	RTD temperature transmitter (includes range card) .....	230
SR2400 .....	Thermocouple transmitter, non-isolated (includes range card) .....	230
SR2401 .....	Thermocouple transmitter, isolated (includes range card) .....	290
SR2700 .....	Frequency transmitter (includes range card) .....	255
SR2800 .....	Potentiometer position transmitter (includes range card) .....	230
SR-CARD .....	Transmitter range card .....	40

## TWO-WIRE TRANSMITTER MOUNTING HARDWARE & ACCESSORIES

		<b>PRICE</b>
CLP8500 .....	Mounting clip (Killark, TW8000) .....	\$ 20
DMP2000 .....	DIN-rail mounting plate (SF1000, SR2000, TW300) .....	20
DMP8500 .....	DIN-rail mounting plate (SC5000, SC5010, TW8000) .....	25
DR1 .....	35mm Symmetrical DIN Rail, 1 meter length .....	25
HKB-HFC .....	Explosion-proof housing (Killark, TW8000) .....	230
TRK48 .....	PVC snap-track, 48 " length .....	35
TSH-A6L .....	NEMA-4 aluminum connection head (SF1000, SR2000, TW300) .....	70
XIHFCX2L .....	Explosion-proof housing (Adalet, SC5000) .....	230
XIHFGCX2L .....	Explosion-proof housing with window (Adalet, SC5010) .....	330
XJAY .....	Explosion-proof housing (SR2000, TW300) .....	165

# TW SERIES™



## TW300 SERIES TWO-WIRE TRANSMITTERS

		<b>PRICE</b>
TW301 .....	Potentiometer input .....	\$ 200
TW303 .....	RTD input .....	200
TW304 .....	Thermocouple input .....	200



# LM1000 SERIES

## LEVEL MONITOR AND CONTROL



		<b>PRICE</b>
LM1000-N4 .....	Level Monitor and Control, NEMA-4 Mount .....	\$ 625
LM1000-PM .....	Level Monitor and Control, Panel Mount .....	625

### LM1000 SERIES ACCESSORIES

		<b>PRICE</b>
LME-N4 .....	NEMA-4X Enclosure .....	\$ 205
LS1000 .....	Level Sensor, 40 ft. Cable .....	1100
LS1000FL .....	Level Sensor with Flange, 40 ft. Cable .....	1130

## MOSCAD INTERFACE PRODUCTS

		<b>PRICE</b>
SIB-V245/V453 .....	Interface Board for Motorola™ ACE3600 .....	\$ 390
PPS-120/24 .....	24 VDC Power Supply for SIB-V245/V453 .....	75
SIB-MCE-T1 .....	Interface Board for Motorola™ MC Edge .....	390



## WIRELESS SIGNAL CONDITIONERS, ALARMS



		<b>PRICE</b>
DR9011 .....	Point to Point Wireless Transmitter (Used with DR9021)	
-01 .....	Dual DC Input .....	\$ 915
-02 .....	Strain Gauge (Bridge) Input .....	915
-03 .....	RTD Input .....	915
DR9011R .....	Point to Point Wireless Repeater (Used with DR9011 and DR9021) .....	915
DR9021 .....	Point to Point Wireless Receiver (Used with DR9011) .....	915
DR9031 .....	Point to Point Wireless Tranceiver (Complete System Requires 2 Sets, (1) DR9031TX and (1) DR9031RX at each location)	
-01 .....	Dual DC Input .....	\$ 1825
-02 .....	Strain Gauge (Bridge) Input .....	1825
-03 .....	RTD Input .....	1825



# WIRELESS SIGNAL CONDITIONERS, ALARMS

## ANTENNAS

		<b>PRICE</b>
4008 .....	7" Whip, 2.1dBi Gain .....	\$ 55
4023 .....	3" Omni, 2.1dBi Gain .....	45
4275 .....	27" Omni with Mount Bracket, 6.0 dBi Gain .....	120
4241 .....	54" Omni, 8.5dBi Gain .....	350
4009 .....	3 Element Yagi, 8.0 dBi Gain .....	125
4078 .....	5 Element Yagi, 11 dBi Gain.....	125
4079 .....	7 Element Yagi, 12 dBi Gain.....	140
4025 .....	10 Element Yagi, 14.0 dBi Gain.....	175
4152 .....	Stacked 10 Element Yagi, 16.0 dBi Gain .....	425
4063 .....	2.4 GHz, 16 Element Yagi, 14.0 dBi Gain.....	160

## ACCESSORIES

		<b>PRICE</b>
4026 .....	Antenna Adapter NF/NF Bulkhead .....	\$ 20
4024 .....	Antenna Adapter NM/NF Bulkhead (For P/N: 4023).....	35
4044 .....	Bracket Mirror Mount NM (For P/N: 4023).....	50
4045 .....	Ground Plane GP4.....	15
4242 .....	Mount Bracket (For P/N: 4241) .....	50
4082 .....	Crimp Tool 400 Cable .....	80
4073 .....	Coupler 2-Port 900 MHz CC850 .....	205
4051 .....	Coupler 4-Port 900 MHz QC850 .....	220
4061 .....	Coupler 4-Port 2.4 GHz QC2400 .....	200
4062 .....	Conn 50 Ohm N-Term (For P/N: 4073,4051,4061) .....	25
4022 .....	PSP24-024S, 24 VDC 1 Amp Power Supply .....	145
4011 .....	Surge Protector NM/NF w/ Bulkhead.....	120
4035 .....	Surge Protector NF/NF w/ Bulkhead .....	120

## ENCLOSURES

		<b>PRICE</b>
ENCL901-TX .....	Pre-Wired Enclosure for Wireless Transmitters (DR9011 - DR9051R).....	\$ 335
ENCL901-RX .....	Pre-Wired Enclosure for Wireless Receivers (DR9021) .....	335

## WIRELESS CABLES

		<b>PRICE</b>
CPT2 .....	2 Ft WBC195 Cable w/ RP-SMA & NM CONN .....	\$ 30
CPT6 .....	6 Ft WBC195 Cable w/ RP-SMA & NM CONN .....	40
CPT10 .....	10 Ft WBC195 Cable w/ RP-SMA & NM CONN .....	45
C195NM-NM-2 .....	2 Ft WBC195 Cable w/ NM & NM CONN .....	35
C400NM-NF-10 .....	10 Ft WBC400 Cable w/ NM & NF CONN.....	75
C400NM-NF-20 .....	20 Ft WBC400 Cable w/ NM & NF CONN.....	95
C400NM-NF-30 .....	30 Ft WBC400 Cable w/ NM & NF CONN.....	110
C400NM-NF-40 .....	40 Ft WBC400 Cable w/ NM & NF CONN.....	125
C400NM-NF-50 .....	50 Ft WBC400 Cable w/ NM & NF CONN.....	150
C400NM-NF-75 .....	75 Ft WBC400 Cable w/ NM & NF CONN.....	205
C400NM-NF-100 .....	100 Ft WBC400 Cable w/ NM & NF CONN.....	250
C400NM-NM-10 .....	10 Ft WBC400 Cable w/ NM & NM CONN.....	75
C400NM-NM-20 .....	20 Ft WBC400 Cable w/ NM & NM CONN.....	95
C400NM-NM-30 .....	30 Ft WBC400 Cable w/ NM & NM CONN.....	105
C400NM-NM-40 .....	40 Ft WBC400 Cable w/ NM & NM CONN.....	125
C400NM-NM-50 .....	50 Ft WBC400 Cable w/ NM & NM CONN.....	150
C400NM-NM-75 .....	75 Ft WBC400 Cable w/ NM & NM CONN.....	205
C400NM-NM-100 .....	100 Ft WBC400 Cable w/ NM & NM CONN.....	250

# CUSTOMER SERVICE AND WARRANTY POLICY

## IN WARRANTY PRODUCTS

Specific product warranty information may be obtained by referencing the user manual that was shipped with the product or by contacting the factory.

Lightning strikes, power surges, and all incorrect use and wiring are not covered by any warranty. Relays and antennas are not covered by any warranty.

All accessories carry a limited 90 day warranty.

**NOTE:** ALL WARRANTY RETURNS FOUND TO BE IN PROPER OPERATING ORDER (NO FAULTS FOUND) ARE SUBJECT TO A TEST/RECALIBRATION CHARGE OF \$50.00 PER UNIT.

## OUT OF WARRANTY PRODUCTS

Product will be considered out of warranty if it is older than the specified warranty period from the date of shipment from the factory or if in the opinion of the company, it exhibits any of the following defects:

Broken or removed warranty seal.

Usage beyond rated specifications (including lightning and power surges).

Physical abuse.

Improper installation.

Customer modification to on-board circuits without express written approval from the company.

**NOTE:** ALL OUT OF WARRANTY REPAIRS ARE SUBJECT TO A MINIMUM CHARGE OF \$75.00, OR PARTS AND LABOR COSTS, WHICHEVER IS GREATER.

## PRODUCTS NOT MANUFACTURED BY WILKERSON INSTRUMENT COMPANY INC.

All products not manufactured by Wilkerson Instrument Co. are warranted by their respective manufacturer and will carry the manufacturer's factory warranty. It is recommended that the customer first contact the original manufacturer for warranty returns. If the customer requires assistance in contacting the original manufacturer Wilkerson Instrument Company will be happy to assist.

Please do not ship non-Wilkerson Instrument Company manufactured products back to Wilkerson Instrument Company unless expressly informed to do so.

## RETURNED GOODS

CALL CUSTOMER SERVICE, 1-800-234-1343, FOR RETURN AUTHORIZATION (RMA#) ON ALL RETURNS.

Wilkerson Instrument Company strives to repair and return warranty repairs within two (2) business days after receiving the product at our factory.

## REPAIRS

RMA number must be referenced on all paperwork. This ensures that scheduled return dates will be met.

All shipments to Wilkerson Instrument Company must be freight prepaid; FOB destination (North America). Or DAP Destination for international customers. Return freight going out UPS/UPS Blue will be paid by Wilkerson Instrument Company on warranty items only.

Any special shipment methods are at the customer's expense and should be prearranged with Customer Service before return of items. All non-warranty repairs, modifications, and calibration shall be subject to parts, labor, and return shipping costs. All products should be adequately packaged to protect against shipment damage.

## RETURNS FOR CREDIT


RMA number must be referenced on all paperwork.

Product returned for credit is subject to restocking fees of 20%, plus 10% per month from the Invoice date.

**YOUR FACTORY CONTACT:** \_\_\_\_\_

**YOUR PROJECT:** \_\_\_\_\_

**NOTES:** \_\_\_\_\_

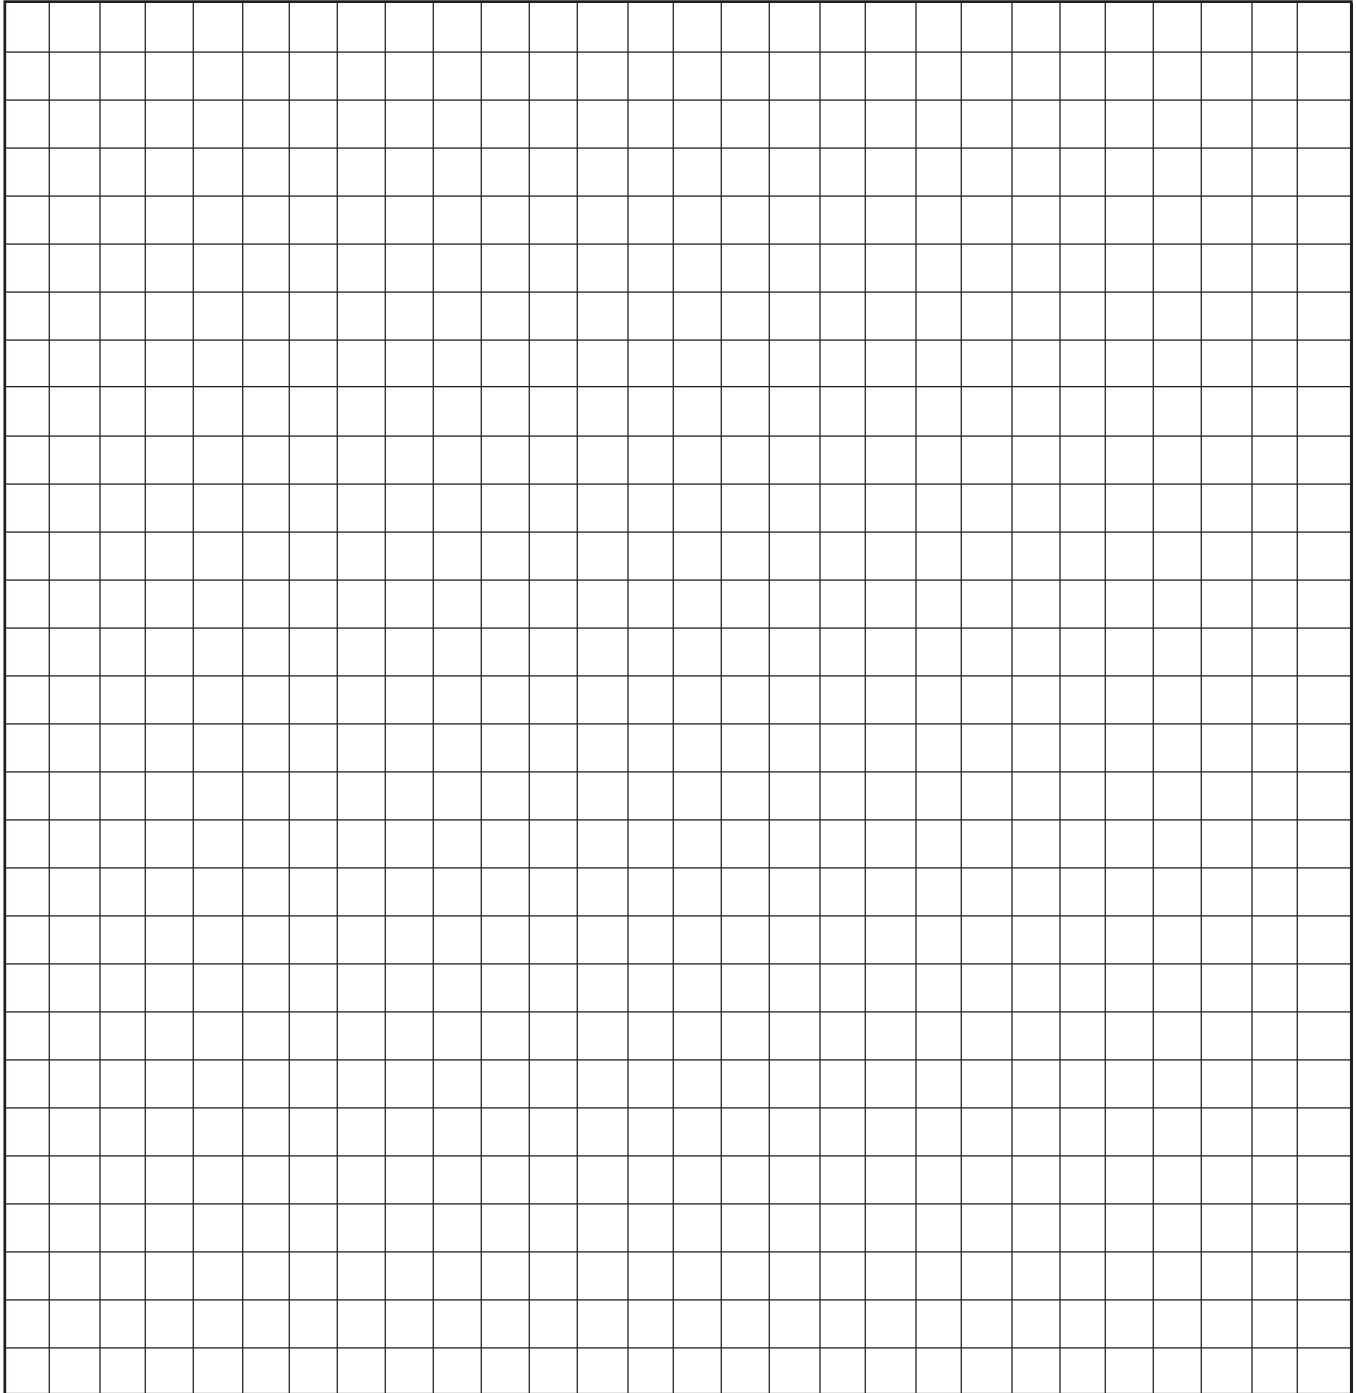

**2915 Parkway Street · Suite 100 · Lakeland, FL 33811-1391 · USA**  
**800-234-1343 · TEL: 863-647-2000 · FAX: 863-644-5318**

Internet: [www.wici.com](http://www.wici.com) · Email: [sales@wici.com](mailto:sales@wici.com)  
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE